HOSHIZAKI

KM-60C HC DRAIN PUMP

Crescent 52kg Ice Maker - Self Contained

Model Number
91000916


PRODUCT FEATURES

- Individually shaped crescent ice.
- Protected by HoshiGuard Antimicrobial Agent.
- CycleSaver® technology includes a double-sided evaporator, uniquely crafted in stainless steel, which produces ice on both sides, resulting in more ice in less amount of time.
- EverCheck™ Control Board with audible alarm and diagnostic features, designed to assist service technicians in diagnosing problems.
- Accessible digital operation panel allows for easy identification of operation status and cause of faults.
- Automated cleaning function makes cleaning simple and saves time.
- Durable stainless-steel exterior.
- Easily removable & cleanable air filters on front panel.
- Accessories: Manual, Scoop, check valve, Hex Bolt legs and 150mm adjustable legs included (water filter and optional hex bolt legs sold separately)






TECHNICAL DRAWING

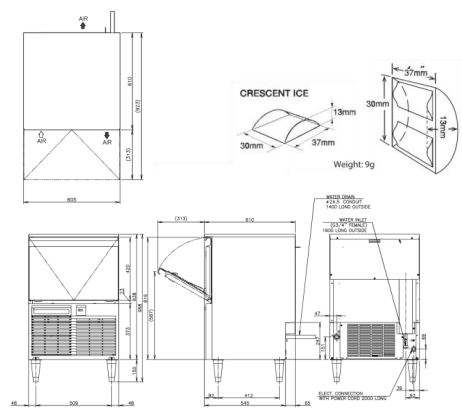

HEIGHT
842mm (H) with included hex bolt leg or
982-1005mm (H) with included 150mm adjustable legs

DRAIN PUMP

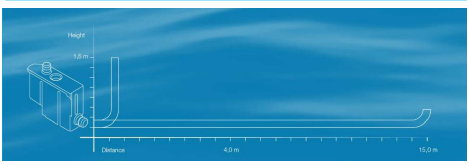

*As height increases, the discharge distance decreases in a directly proportional manner.

- Pump out Drain - Maximum height (H) 1.5metres at length (L) 5metres, Maximum height (H) .5metres at length (L) 15metres.
- Reduced installation time: Internal drain pump simplifies installation task.
- Plug and play efficiency: Easy drain connection without complications.

PRODUCT SPECIFICATION

Production Capacity / 24hrs	Approx. 52kg @ 21°C Air temp; 15°C Water Approx. 37kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 23kg
Freeze Cycle Time	Approx. 26 Min (At. 21°C Air ; 15°C Water)
Ice Production / cycle	Approx. 0.96kg/110pcs
Dimensions	605mm (W) x 610mm (D) x 842mm (H) including hex bolt legs 988mm (H) with 150mm adjustable legs
Cooling	Air
Weight Net/Gross (kg)	45/57
Refrigeration System	Forced Air Circulation
AC Supply Voltage	1 PHASE 220-240V 50Hz / 10amp Plug
Amperage	Running: 1.6A Starting: 8.5A
Refrigerant Charge	R290/90g
Operating Conditions:	
Ambient Temp	7-38°C
Water Supply Temp	7-32°C
Water Supply Pressure	0.07-0.8MPa (0.7-8bar)
Voltage Range	±6%
Electrical consumption	Rated Motor: 255W (Power Factor: 63%)
Water Consumption / 24hrs	Approx. 0.14m³/d(AT. 21°C ; WT 15°C)

INSTALLATION REQUIREMENTS

- Ensure the condenser is cleaned periodically as per the manufacturer's manual.
- Do not plug the unit into multi-plug power boards with other appliances
- Installation Consider room ventilation or installing air conditioning to improve environment working conditions.
- Hoshizaki recommends the use of a compatible water filter to prevent non-warrantable scale & sediment complications.

*Refer to manual for full installation & maintenance requirements.

For free 6 month extended warranty, register online within 4 weeks of purchase date.
hoshizaki.com.au

Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes. Copyright © 2023 Hoshizaki Lancer Pty Ltd. All right reserved.